




Customer Service: 208.801.8179 [www.innovativecorvetteproducts.com](http://www.innovativecorvetteproducts.com)

## C3 Corvette Speaker Kits

Corvettes 1978-1982

Thank you for your purchase. Our Audiophile sound cabinets feature a unique “tuck-a-way” mounting design that won’t compromise storage compartment space. Plus, the “toe-in” angled cabinet placement creates an optimum sound direction in your Corvette. Unlike typical speaker placement, our cabinets with their angled design create a “sweet spot” in the front center of your car. The sweet spot provides a spectacular enhancement in sound for your listening pleasure.

### Optimum Sound Direction

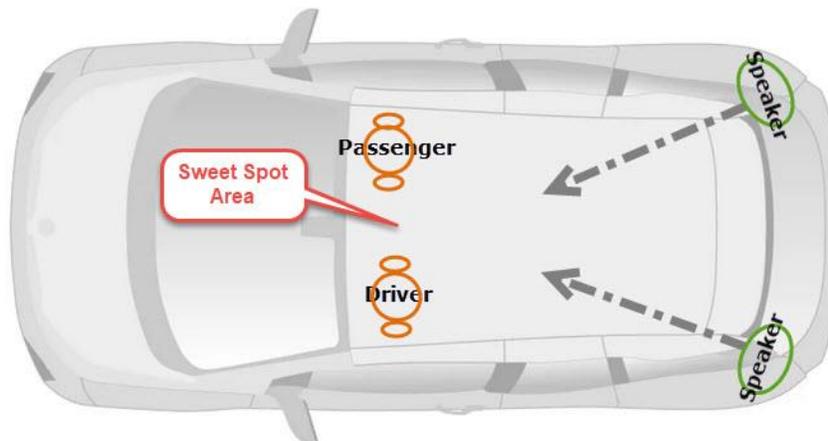

### Speaker Kit Contents:

Premium MDF carpeted speaker boxes predrilled for speakers and attachment.  
Speaker box attachment hardware (“L” Brackets”), and screws

### Speaker Equipped Kits:


Pair of Rockford Fosgate Prime speakers (4 ohm 2-Way, 65 Watts RMS, 130 Watts Max)  
Speaker wires, Mounting Hardware

### Installation Instructions:

Start by removing the factory rear speakers. Remove 3 screws for each speaker panel (see Fig A and B).

After the factory speakers are removed, attach supplied “L” brackets to each speaker cabinet using the pre-drilled holes and the (6) ½ inch screws. Next, position each speaker in the left and right corners of the rear storage compartment area as indicated in the picture below.

After the cabinets are in place, mount the bottom “L” bracket by first using the factory mounting location with the supplied one-inch screws (See Fig C). Then you will position the top “L” bracket to line up with the factory brace, attach the bracket to the brace using supplied self-tapping screws, or mark and pre-drill brace with a 1/8th inch drill bit (See Fig D).

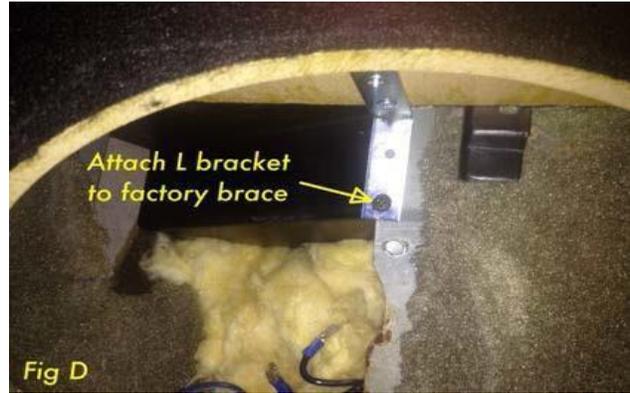

Next, you will need to connect your new speakers to the factory wiring. The passenger side speaker wire colors are Blue (+), and Light Blue (-). The driver's side wire colors are Brown (+), and Yellow (-).



**Very Important!** You must attach the Positive (+) factory speaker wire to the Positive (+) terminal of your new speaker, and the same with the Negative (-) factory speaker wire. Getting this wrong will severely decrease your sound quality and bass response.

Now that your speakers are wired up, turn on your stereo and do a quick test to verify that both speakers are working correctly. Once proper functionality has been tested, you can now mount your speakers to the cabinets using the four pre-drilled holes. For questions about installation, please contact us at 208-801-8179. **US Patented - Made in the USA**



Our production facility.