



Customer Service: 208.801.8179
www.innovativecorvetteproducts.com

C3 Corvette Speaker Kits

Corvettes 1978-1982

Thank you for purchasing our speaker kit.

These unique superior sound speaker kits are designed to take advantage of a C3 Corvette's natural acoustical configuration without compromising compartment space. Installation of the kit will not interfere with the illumination from your rear interior light nor the storage of your T-tops. Our kits are available with or without Rockford Fosgate speakers. The speaker cabinets are made of MDF speaker acoustical material which have been predrilled with screw holes for easy speaker installation and removal.



Speaker Kit Contents:


- Premium MDF carpeted speaker boxes predrilled for speakers and attachment.
- Speaker box attachment hardware ("L" Brackets"), and screws

Speaker Equipped Kits:

- One pair of Rockford Fosgate Prime speakers (4 ohm 2-Way, 65 Watts RMS, 130 Watts Max)
- Speaker wires, Mounting Screws
- Speaker Instructions

Installation Instructions:

Start by removing the factory rear speakers. Remove 3 screws for each speaker panel, see Fig A and B. After the factory speakers are removed, attach supplied "L" brackets to each speaker cabinet using the pre-drilled holes and the (6) ½inch screws. Next, position each speaker into the left and right corners of the rear storage compartment area as indicated in picture. When eventually attached to the rear panel, speakers will be at a cross angle to the seats for best sound positioning.

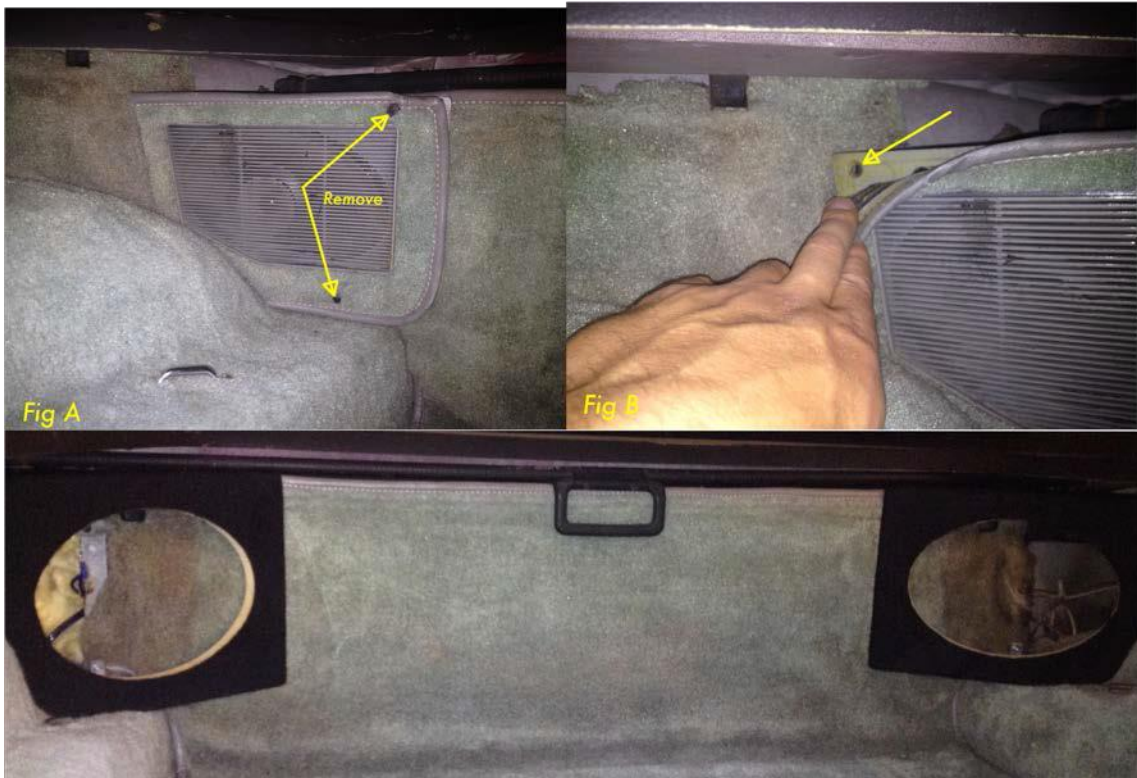

After cabinets are in place, mount bottom "L" bracket first using factory mounting location with supplied 1inch screws, See Fig C. Then you will position top "L" bracket to line up with factory brace, attach bracket to brace using supplied Self Tapping screw, or mark and pre-drill brace with 1/8inch drill bit, See Fig D.



Next, you will need to connect your new speakers to the factory wiring. The passenger side speaker wire colors are Blue (+), and Light Blue (-). The driver's side wire colors are Brown (+), and Yellow (-).

Note: Very Important!

You must hook the Positive (+) factory speaker wire to the Positive (+) terminal of your new speaker, and the same with the Negative (-) factory speaker wire. Getting this wrong will severely decrease your sound quality and bass response.

Now that your speakers are wired up, turn on your stereo and do a quick test to verify that both speakers are working correctly. Once proper functionality has been tested, you can now mount your speakers to the cabinets using the four pre-drilled holes.



Congratulations!

You have successfully installed your new speaker cabinets, now start enjoying your new driving experience with some of your favorite tracks.

For questions about installation, please contact us at 208-801-8179.

US Patented - Made in USA

